INSTALLATION INSTRUCTIONS

Item#6684-143/613 (New. 03/28/2011)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Position mounting plate (A) on the wall, and mark location of two dry wall anchors (H). Pre-drill the holes for the dry wall anchors. Insert the dry wall anchors (H) into the wall.
4. Attach the mounting plate (A) to the junction box in the wall using the screws (B). The side of the mounting plate marked "GND" must face out.
5. Place the wood screws (I) through the hole into the dry wall anchors (H) to secure the mounting plate (A). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the mounting plate using the Green Screw provided. After wires are connected, tuck them carefully inside the Junction Box.

FINISHING THE INSTALLATION (Fig.1)

7. Place Canopy (C) over Mounting Plate (A), fasten with Screws (D) by using Allen Wrench (G).
8. Place Glass Shade (E) over socket and secure with Screw Shell (F).
9. Install light bulbs (not included) in accordance with fixture specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

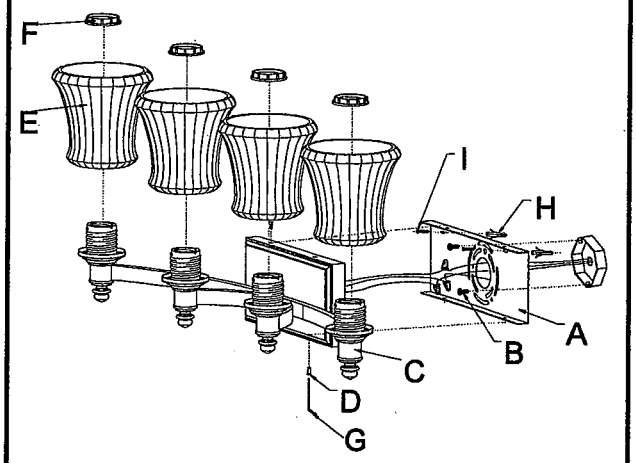

Fig. 2

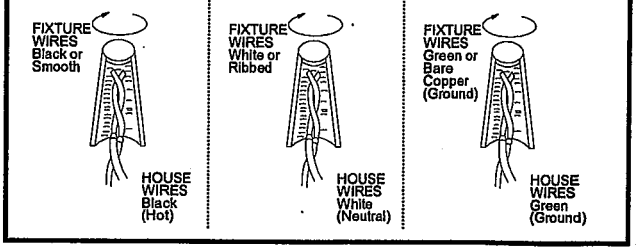
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Green or Bare Copper (Ground)
HOUSE WIRES Green (Ground)

Intertek

american lighting association